

Operator's Guide
for **Talent Mode**

(This Operator's Guide covers Talent Mode only)


LCD Display, Function Keys, & Cursor Keys

The top row of buttons will have their function displayed on the screen above. The cursor-bar is controlled using the ▼ & ▲ keys. *Select* chooses the highlighted item.

Press *Mode*, then choose *Choose Show* to select a show*.

Press *Mode*, then choose *Director's Mode* to select *Talent* (on-air control) or *Producer* (screener phone).

*Series 2101 only

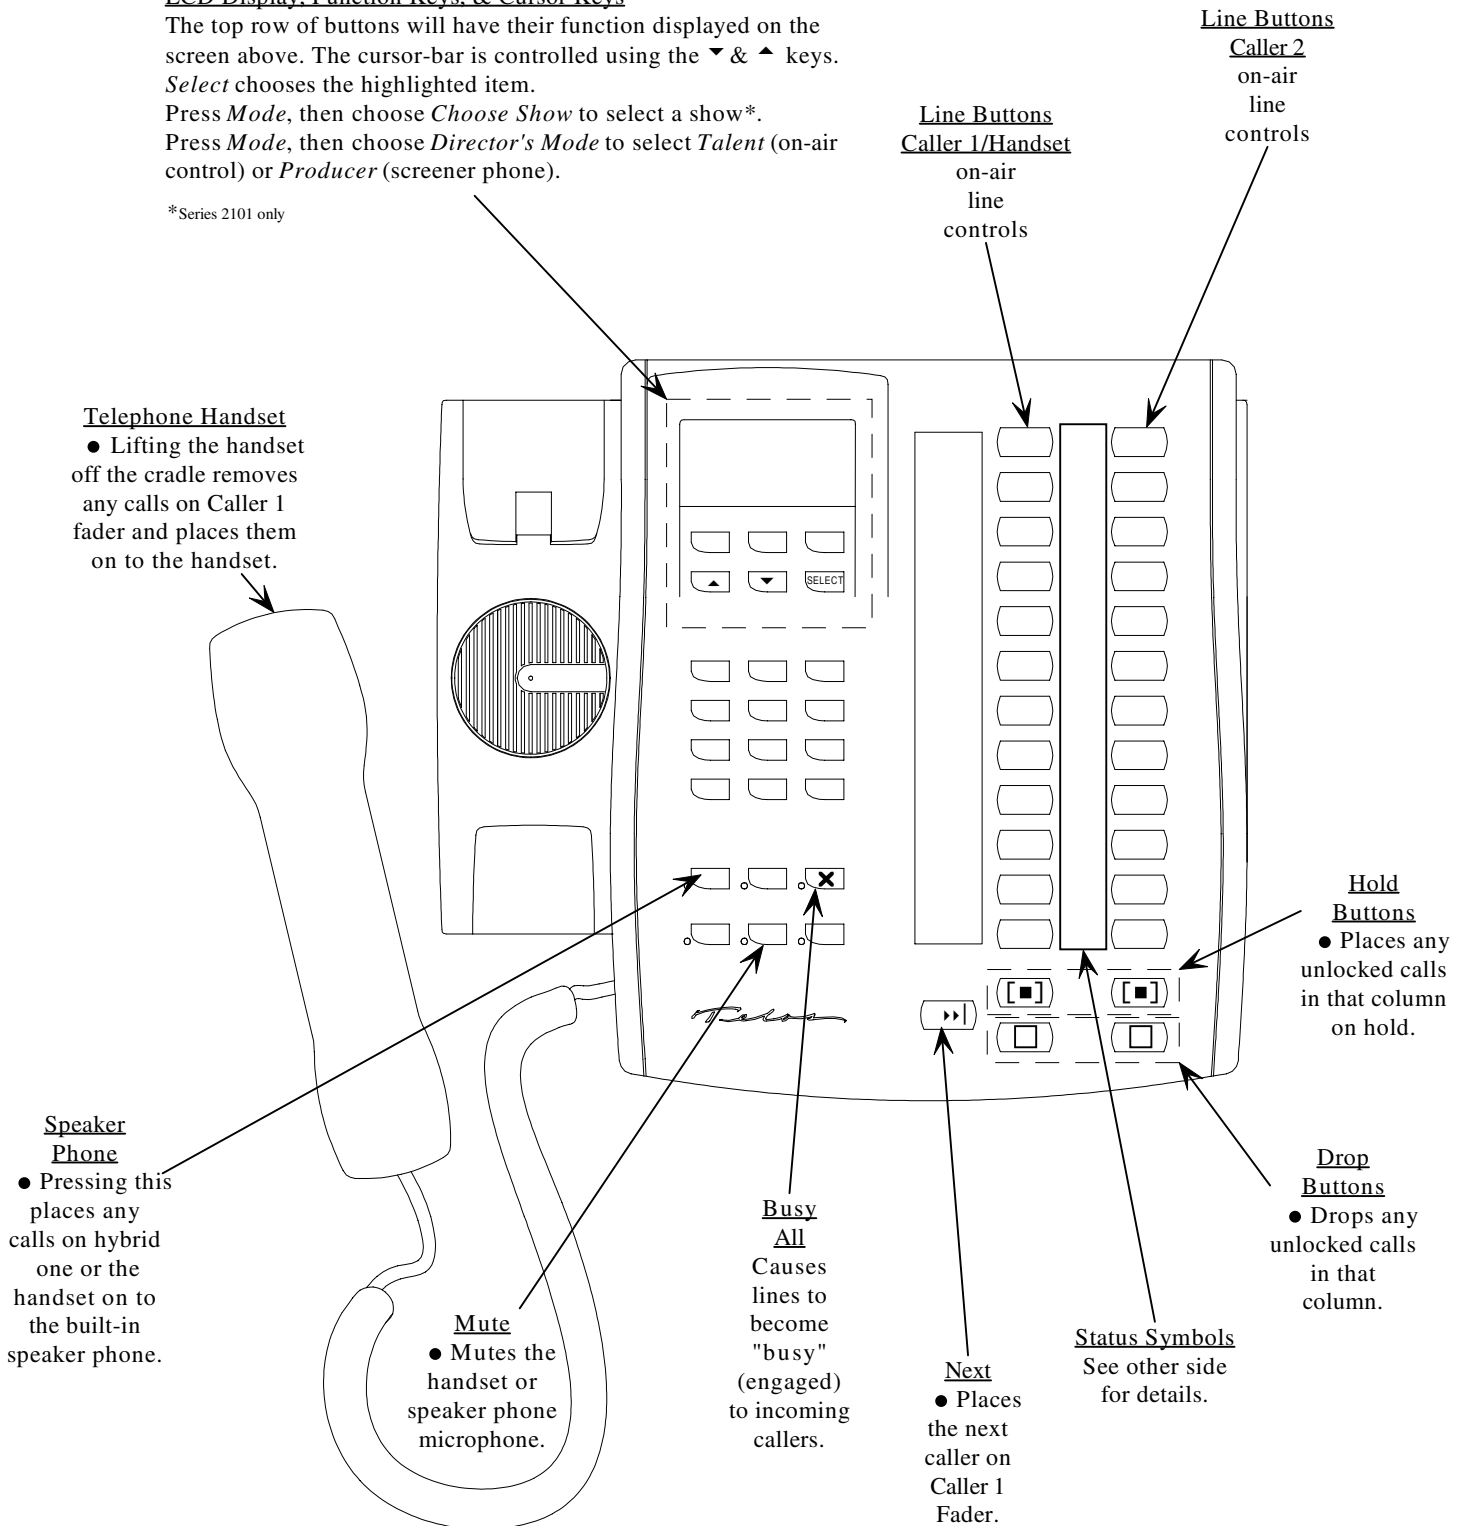

Telos Desktop Director Status Symbols™ in Talent Mode



This line is assigned to your show, but is currently idle.



This line is in use in another studio.



This line is ringing.



This line is on hold.



This line is on-air on the Caller 1 fader.



This line is on-air on the Caller 2 fader.



This line is on-air & locked - Caller 1 fader
Pressing the left line button will unlock this line.



This line is on-air & locked - Caller 2 fader
Pressing the right line button will unlock this line.



The caller on this line has been screened.



The caller on this line has been screened and is up next.
Pressing the next button will put this caller on-air on Caller 1 fader.



This line has been "busied" by the busy-all function
Press "X" button to cancel busy-all.



This line is currently in use on the handset (or headset)



This line is currently in use on the speakerphone)



This line is not assigned for this show configuration